


## 11.5kW 208-240V 3PH Monitored PDU - LX Interface, Gigabit, 48 Outlets, IEC 309 16/20A Red 360-415V Input, LCD, 1.8 m Cord, 0U 1.8 m Height, TAA

MODEL NUMBER: **PDU3XEVN6G20**

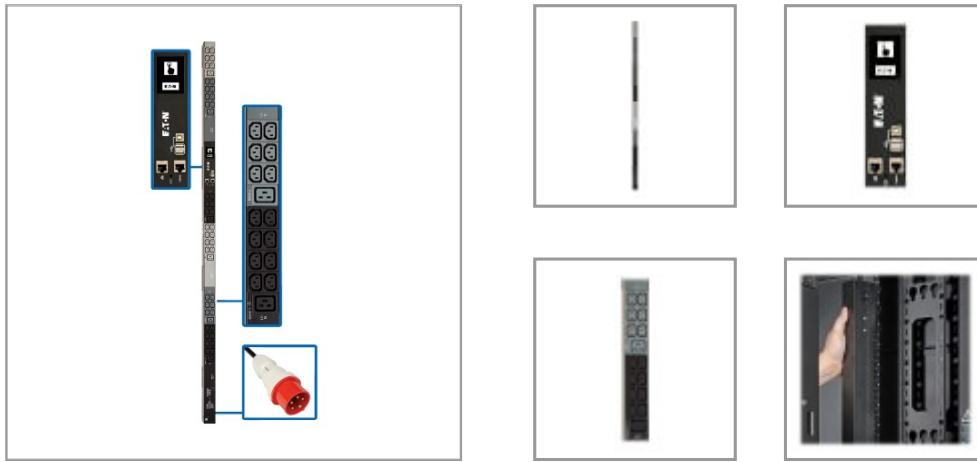

3-phase monitored PDU with touchscreen LCD distributes and monitors power in a data center, server room or high-density network closet.

### Features

**3-Phase PDU Distributes and Monitors Network-Grade Power** This monitored PDU provides real-time remote monitoring of voltage and load levels via its built-in network interface. Ideal for data centers, server rooms and high-density network closets, the PDU3XEVN6G20 features 42 C13 and six C19 208-240V outlets in three load banks, which distribute AC power to rack equipment. Each load bank is accompanied by an LED that illuminates green when it is ready to distribute power. The banks can be individually monitored to ensure proper load balance and prevent downtime. Plug-lock insert sleeves are included to prevent connected cables from becoming accidentally dislodged.

**Built-In GbE-Capable Network Management Card Allows Remote Access 24/7** The built-in WEBCARDLX with the latest version of PowerAlert Device Manager firmware (PADM20) provides enhanced remote management capabilities, including customizable dashboard graphs to fit user preferences. The PADM20 upgrade and PowerAlert Element Manager (PAEM) software form a powerful tool for expanding maintenance functions in large installations, including firmware update checks and backup and restoration of device configurations.

**Color Touchscreen LCD Offers Important Data at a Glance** An easy-to-navigate color touchscreen LCD reports network data, including IP address, input current level per phase, and output current per load bank with  $\pm 1\%$  billing-grade accuracy. It also generates a unique QR code to allow read-only access to the 0U PDU via mobile device. If an EnviroSense2 module is connected to the 3-phase PDU, the LCD also displays status and environmental data, such as temperature and humidity.

**Easy to Install Vertically in an EIA-Standard 19 in. Rack** The 70-inch 0U rack PDU (rPDU) mounts vertically using the included toolless mounting buttons or the included rack-mounting brackets. Spare buttons are also included. Use the included PDUMVROTATEBRKT kit to install the PDU with outlets facing the rear for better airflow or equipment access. A 6-ft. (1.83 m) cord with IEC 309 16/20A Red (3P+N+E) 380/400/415V 3-phase input connects the PDU to a compatible AC power source, generator or protected UPS.

**TAA-Compliant for GSA Schedule Purchases** The PDU3XEVN6G20 is compliant with the Federal Trade Agreements Act (TAA), which makes it eligible for GSA (General Services Administration) Schedule and other federal procurement contracts.

### Highlights

- 42 C13 and 6 C19 208-240V outlets distribute AC power to connected equipment; Compatible with Eaton Tripp Lite power cords.
- Pre-installed GbE-capable WEBCARDLX with latest version of PADM20 for enhanced remote management
- Installs in 0U of rack space in standard 19 in. racks using included mounting hardware
- 1.8 m power cord with IEC 309 16/20A Red (3P+N+E) 3-phase input connects to AC power source
- Color touchscreen LCD provides current levels, environmental data and network info

### Applications

- Power mission-critical rack equipment in a data center, computer room or high-density network closet
- Monitor power loads from various computers, switches, servers and other networking equipment
- Maintain a computer network in a government, commercial or industrial facility

### Package Includes

- PDU3XEVN6G20 11.5kW 3-Phase Monitored PDU
- Built-in LX Platform interface
- Configuration cable
- (48) Plug-lock insert sleeves
- Rack-mounting hardware
- Spare mounting buttons
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



Powering Business Worldwide

**2-Year Warranty** The PDU3XEVN6G20 is backed by a 2-year warranty, ensuring reliability and performance.

## Specifications

OVERVIEW	
UPC Code	037332206923
PDU Type	Monitored
INPUT	
Input Phase	3-Phase
PDU Input Voltage	360; 380; 400; 415
Recommended Electrical Service	Three-phase 16A 360-415V service
Maximum Input Amps	16
Maximum Input Amps Details	Agency de-rated to 16A continuous (North America)
PDU Plug Type	IEC-60309 16/20A RED (3P+N+E)
Input Cord Details	11GA / 4mm <sup>2</sup> (SOOW/ H07RN-F); IP44 Splashproof connector
Input Cord Length (ft.)	6
Input Cord Length (m)	1.83
OUTPUT	
Output Capacity Details	11.5kW (415/240V), 11.1kW (400/230V), 10.5kW (380/220V), 10kW (360/208V) total capacity; 16A max per output phase (L1-L2, L2-L3, L3-L1); 16A max per C19 outlet; 12A max (10A CE) per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacle Details	Compatible with Eaton Tripp Lite Power Cords
Output Receptacles	(42) C13; (6) C19
Output Nominal Voltage	208-240V
USER INTERFACE, ALERTS & CONTROLS	
Reported Load Segments	Supports monitoring of current per input phase (L1, L2, L3) and output current per load bank (Banks 1-3); Outlets are color-coded and labeled for phase and load bank identification; L1-L2 powers light gray outlets (Bank 1); L2-L3 powers black outlets (Bank 2); L3-L1 powers dark-gray outlets (Bank 3)
Front Panel LCD Display	Touchscreen LCD reports NETWORK DATA (IP address, Subnet Mask, Gateway, MAC Address, Device Name, Model, Serial Number), INPUT PHASE DATA (Amperage, Wattage, Voltage per phase, plus Unbalance percentage), LOAD BANK DATA (Amperage, Wattage, Voltage per load bank, plus total PDU output in watts), CONFIGURATION DATA (Listing of current configuration settings), ENVIRONMENTAL DATA (Reports data and status of E2 sensor modules; Sensor options are available for temperature and humidity, plus input and output dry contacts), MOBILE ACCESS (Generates a unique QR code to view reported PDU details on a mobile device)
LED Indicators	One LED per output load bank (Bank 1, Bank 2, Bank 3); GREEN (Power On), YELLOW (Warning condition), Red (Critical warning condition)
Current Measurement Accuracy (Amps)	+/-1%
Voltage Measurement Accuracy (Volts)	+/-1%



Powering Business Worldwide

Power Measurement Accuracy (Watts)	+/-1%
<b>SURGE / NOISE SUPPRESSION</b>	
Automatic Shut-Off	No
<b>PHYSICAL</b>	
Material of Construction	Metal
Rack Height	0U
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / in.)	75.87 x 9.65 x 6.89
Shipping Weight (kg)	9.19
Unit Dimensions (hwd / in.)	70.000 x 2.170 x 2.860
Unit Dimensions (hwd / cm)	177.8 x 5.51 x 7.3
Unit Weight (lbs.)	13.49
Unit Weight (kg)	6.12
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	32° to 122°F (0° to 50°C)
Storage Temperature Range	5° to 140°F (-15° to 60°C)
Relative Humidity	5% to 95% non-condensing
Operating Elevation	0-10000 ft. (0-3000 m)
<b>COMMUNICATIONS</b>	
PowerAlert Software	LX Platform Interface: PowerAlert Device Manager
Communications Cable	RJ45-to-DB9 configuration/console Access cable
SNMP Compatibility	Pre-installed LX platform network interface
Network Compatibility	10 Mbps; 100 Mbps (Fast Ethernet); 1 Gbps (Gigabit)
<b>FEATURES &amp; SPECIFICATIONS</b>	
High Availability PDU Features	Remote Network Notifications
<b>STANDARDS &amp; COMPLIANCE</b>	
Product Certifications	EN 60950-1; CAN/CSA-C22.2 No. 60950-1 (Canada); IEC 60950-1; NOM (Mexico); UL 60950-1
Product Compliance	RoHS; FCC Part 15 Class A (USA); UKCA; Trade Agreements Act (TAA)
<b>WARRANTY &amp; SUPPORT</b>	



*Powering Business Worldwide*

Product Warranty Period (Worldwide)	2-year limited warranty
-------------------------------------	-------------------------

1000 Eaton Boulevard

Cleveland, OH 44122

United States

<https://tripplite.eaton.com>

© 2026 Eaton. All Rights Reserved.

Eaton is a registered trademark. All other trademarks  
are the property of their respective owners.